


Specifications**Slot Opening Equivalents**

INCHES	MM	MICRONS	STANDARD SIEVE	TYLER MESH	INCHES	MM	MICRONS	STANDARD SIEVE	TYLER MESH
.001	.025	25	—	—	.033	.850	850	20	20
.0015	.037	37	400	400	.039	1.00	1000	18	16
.002	.050	50	270	270	.047	1.18	1180	16	14
.003	.075	75	200	200	.049	1.25	1250	—	—
.004	.100	100	140	150	.056	1.41	1410	14	12
.005	.125	125	120	115	.059	1.50	1500	—	—
.006	.150	150	100	100	.066	1.68	1680	12	10
.007	.180	180	80	80	.069	1.75	1750	—	—
.008	.212	212	70	65	.079	2.00	2000	10	9
.010	.250	250	60	60	.089	2.25	2250	—	—
.012	.300	300	50	48	.094	2.38	2380	8	8
.014	.355	355	45	42	.098	2.50	2500	—	—
.017	.425	425	40	—	.108	2.75	2750	—	—
.020	.500	500	35	32	.111	2.80	2800	7	7
.023	.600	600	30	28	.118	3.00	3000	—	—
.028	.710	710	25	24	.132	3.35	3350	6	6
.030	.750	750	—	—	.157	4.00	4000	5	—

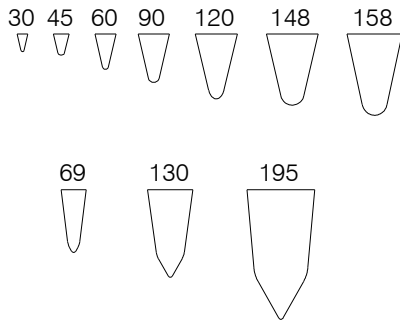

Wires shown approximately twice actual size.

Wedge Wire Sharp Series					
Wedge Wire No.	Wire Width		Wire Height		Relief Angle
	In.	MM	In.	MM	
30	.030	.76	.051	1.30	13°
45	.045	1.15	.060	1.52	13°
60	.060	1.52	.100	2.54	13°
90	.090	2.29	.140	3.56	13°
120	.120	3.05	.185	4.70	13°
148	.148	3.76	.203	5.16	13°
158	.158	4.01	.232	5.89	13°
Wedge Wire Wear Series					
Wedge Wire No.	Wire Width		Wire Height		Relief Angle
	In.	MM	In.	MM	
69	.069	1.75	.185	4.70	6°
130	.130	3.30	.250	6.35	8°
195	.195	4.95	.363	9.22	5°